


The frameless retractable glazing system with the lowest track



Ideal for indoor installations

Claroflex® Pivot mini is perfect for indoor installations although it can also be used for outdoors.

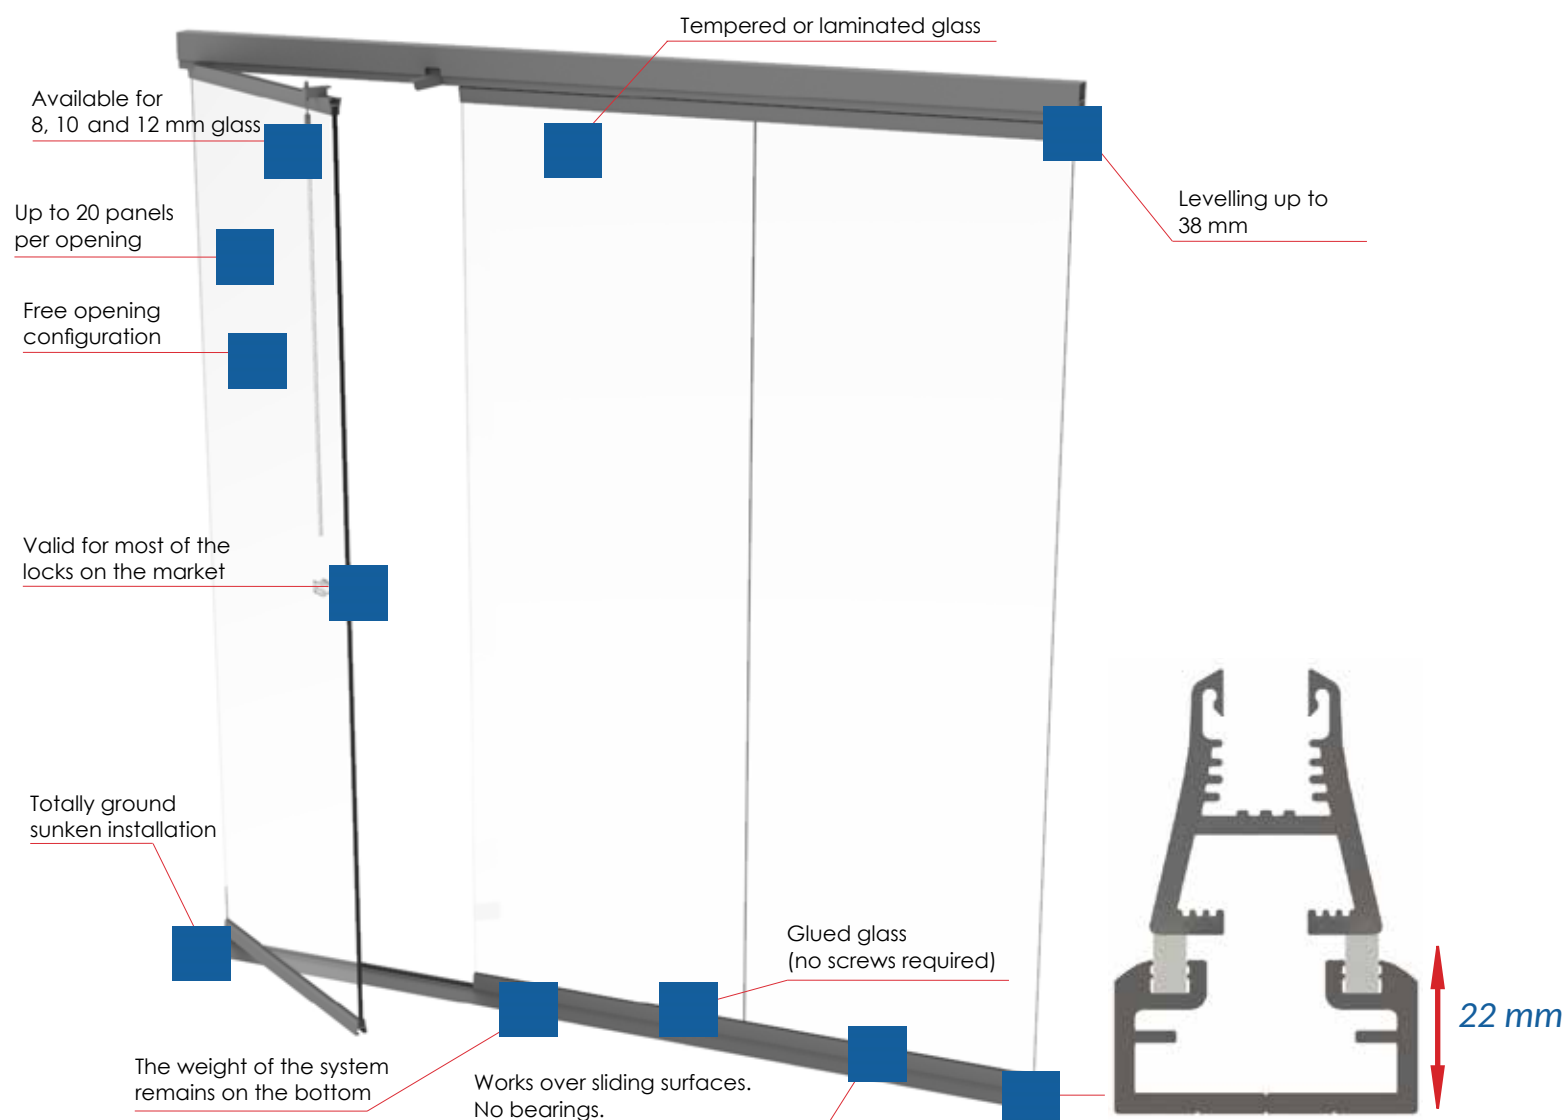

Minimal maintenance

No need for annual costly check-ups.



Fixing screws for glass not needed

Higher reliability and lower cost because there is no need for special screws or drills in the glass.



Quick manufacturing and installation

Up to 50% time reduction of labour costs.



Bottom weight system

Maximum security. Valid for any type of structure.



CLAROFLEX ERP©

A whole solution for our product: project design, quotations, orders and stock management.



No wheels or bearings

Maximum reliability. Smooth and silent functioning over the sliding tracks.



Warranty

All Claroflex® products have 5 years warranty.

Technical details

Features

- **Functioning without bearings.** The system slide over special sliding tracks.
- **Opening options.** Inside or outside opening configuration from both sides is possible, depending on your needs. Top and bottom door locks.
- **Colours.** Anodized and powder coating.
- **Glass.** Tempered or laminated. 8, 10 or 12 mm.
- **High resisting components.** As per the saline mist tests ISO 9227, ASTM B117, DIN 50021. More than 750 hours in the test chambers.

Options



■ **Armless system**

Performances

- **Sound insulation:** 34 dB
- **Thermal transmittance:** 5,6 W/m²K
- **UNE 12600 (2003) test:** 1C1

Data for 10 mm tempered glass.


Max. dimensions

- **Panel width:** 800 mm
- **Door width:** 1000 mm
- **Maximum height:** 3000 mm
- **Maximum number of panels per opening:** 20




■ **Side Lock**


Configurations

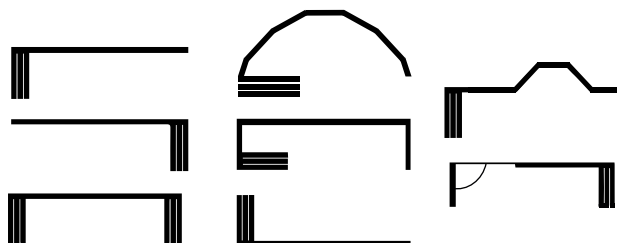

System drawings



Standard system

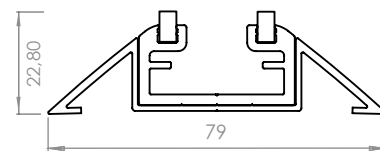

System with floor trim